



Line drawing of the item (with outline dimensions)

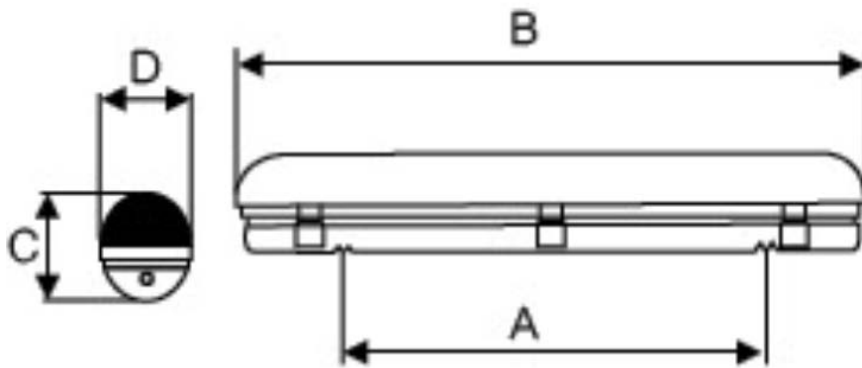

ITEM NO	A (mm)	B (mm)	C (mm)	D (mm)	
79150/18/60	472	675	110	110	
79151/18/60	472	675	110	170	
79150/36/60	905	1275	110	110	
79151/36/60	905	1275	110	170	
79150/58/60	965	1580	110	110	
79151/58/60	965	1580	110	170	

Item number:


Installation drawing (the same as it in its instruction manual)

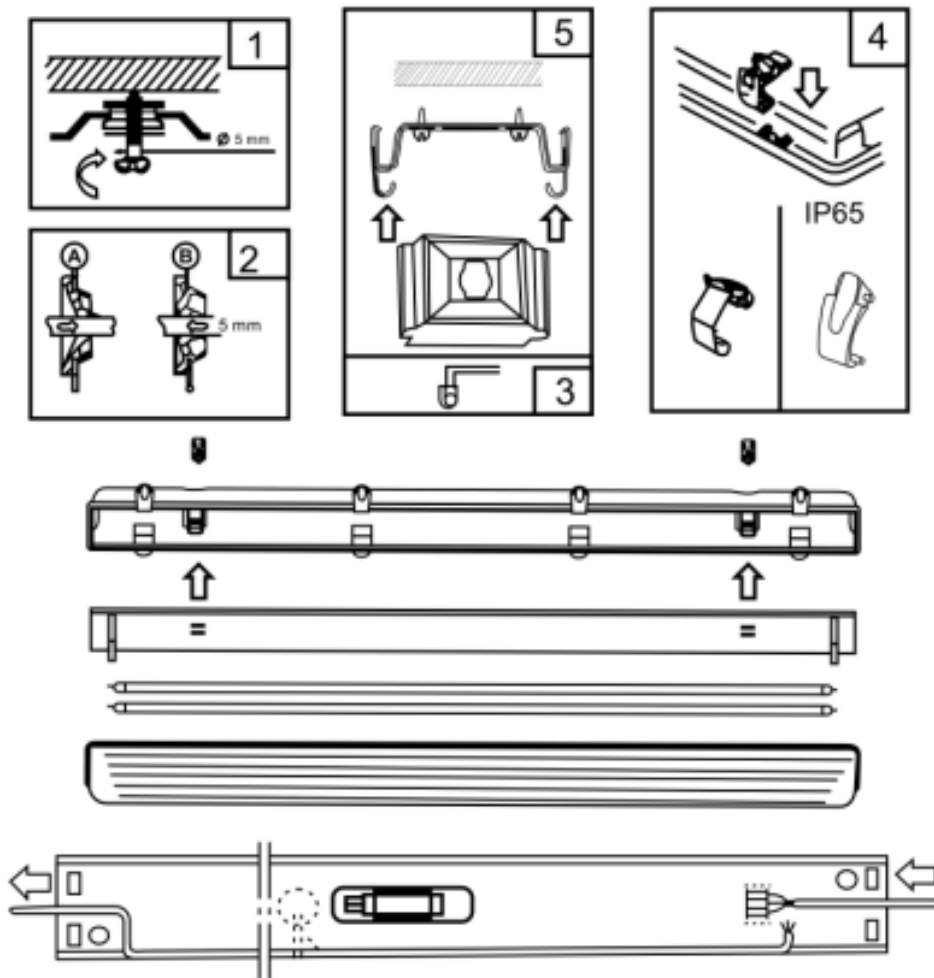

Pleasure notice user:  
This product barely use in coordination  
With conventional ballast  
**ISO9002**

## Technical details

materials used:		Abs base,pc diffuser,metal tray					
color:		grey					
dimmable and how is the fixture dimmable:							
size:	Height:	110mm	110mm	110mm	110mm	110mm	110mm
	Length:	675mm	675mm	1275mm	1275mm	1580mm	1580mm
	Width:	110mm	170mm	110mm	170mm	110mm	110mm
	Net Weight:	13.5kgs	14.1kgs	12.5kgs	12.16mm	16.5KGS	17KGS
power requirements:		230V	230V	230V	230V	230V	230V
bulb type and maximum Wattage:		T8	T8	T8	T8	T8	T8
number of bulbs:	6400k	F18T8	F18T8	F36T8	F36T8	F58T8	F58T8
IP degree:		IP65	IP65	IP65	IP65	IP65	IP65

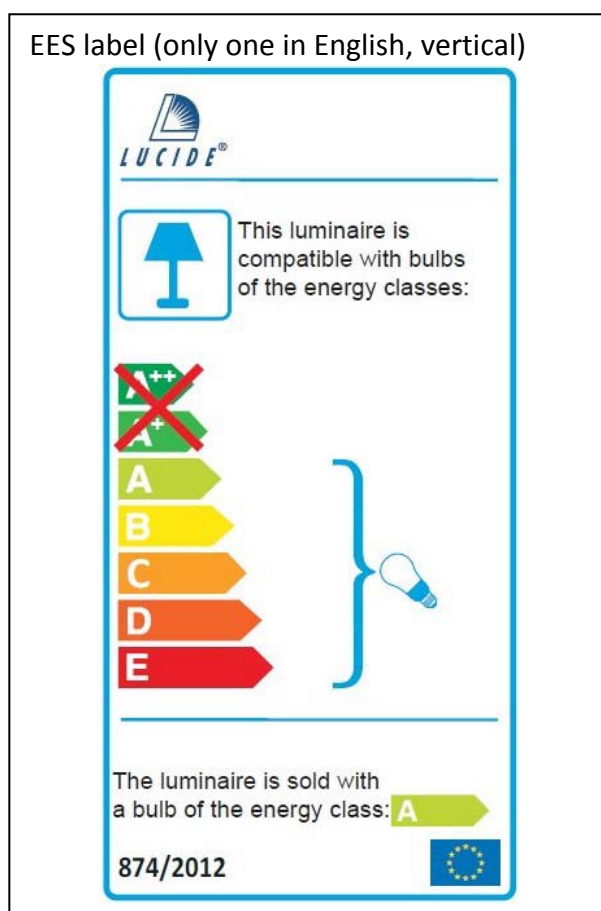

Lucide NV  
 Bisschoppenhoflaan 145  
 2100 Deurne  
 Belgium  
[info@lucide.be](mailto:info@lucide.be)  
 tel: +32 (0)3 366 22 04  
[www.lucide.be](http://www.lucide.be)